

Product Specifications




MODEL
VS36VKOFOG

CATEGORY
Mist Cooling

DESCRIPTION
36" direct drive, portable, oscillating, high-pressure misting fan designed for agriculture, horticulture and industrial use.

FEATURES

- Heavy-duty .75 GPM industrial CAT™ mist pump powered by 3/4 HP motor yields 1000 PSI output.
- Standard garden hose fitting for water supply between 15-75 PSI; automatic low-pressure shutoff.
- Includes 25' outdoor-rated power cord with integrated GFCI.
- Mist pump assembly is housed in a galvanized steel enclosure.
- Fan with totally enclosed, ball bearing, permanently lubricated, permanent split capacitor motor includes white powder-coated steel guard, rugged white polyethylene housing and blue mist ring with 12 .008 nozzles.
- Heavy-gauge steel mobile assembly allows fan to oscillate 90° as well as tilt up and down.



DIMENSIONS


Model	A	B	C
VS36VKOFOG	42"	75"	47"

PERFORMANCE

11,000 CCFM
Nozzle flow rate 0.022 GPM @ 1000 PSI

MOTORS

	Model	HP	Type	Voltage	Amps	RPM
• Fan	CS802	1/2	TEAO	115 / 230	6.0 / 3.5	825
• Mist	CS237	3/4	ODP	115 / 208-230	11 / 5.5-5.5	1725
• Oscillator	GM36VKO-DV	1/100	TE	115 / 208-230	.29 / .17	2.7

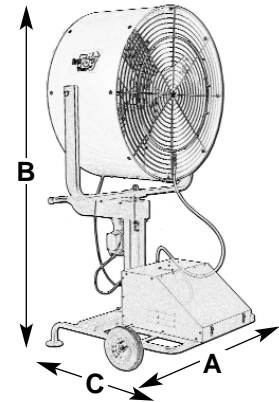

BLADE

Model	Type	Wings	Bore Size	Pitch
GFB-363	Galvanized	3	5/8"	17°

SHIPPING

Weight	Skid Dimension	UPS	Pallet Quantity
315 lbs (1 unit + skid)	53 x 53	No	2 units

Test data, performance, energy consumption and other specifications are based on results in a controlled environment. Actual results will vary. Product specifications subject to change.



800-779-3267 • Fax: 320-251-2922
sales@schaefervent.com • www.schaefervent.com